

Model # TORSHARE UHB07XX Series (7th generation UFO High Bay)



Description


LED UFO High Bay UHB07 is the perfect solution for commercial lighting needs in public infrastructures, warehouses, gyms, manufacturing space and large retail spaces. With an enclosed power supply and covered optics, these light fixtures are designed for durability in commercial and industrial applications. Rated as DLC premium products, they are designed to save energy and lower maintenance costs. The LED light engine inside the fixture uses 70% less power to produce the same amount of light as a fluorescent fixture. This UFO commercial light fixtures are built with LED chips that last for 50,000 hours of continuous

Technical Data				
Brand	UHB0710-100W	UHB0715-150W	UHB0720-200W	UHB0724-240W
Maximum Light Output	15521 lm	22802 lm	31135 lm	36011 lm
Wattage	100 W	150 W	200 W	240 W
CRI	80	80	80	80
Total Harmonic	$10\% \pm 3\%$	$10\% \pm 3\%$	$10\%\pm3\%$	$10\% \pm 3\%$
Distortion				
Lumen Efficiency	140 ~ 155 lm/W	140 ~ 155 lm/W	140 ~ 155lm/W	140 ~ 155 lm/W
Input Voltage	AC 100 ~ 277V (Standard) / AC 277-480V (Available*)			
Frequency	50/60 Hz			
Dimming Status	Continuous Below 10			
Control	Has Integral Control			
Rated Life	50,000+ Hours			
Power Factor	0.95 ± 0.03			
Housing	Aluminum & PC			



Model # TORSHARE UHB07XX Series (7th generation UFO High Bay)

Dimensions

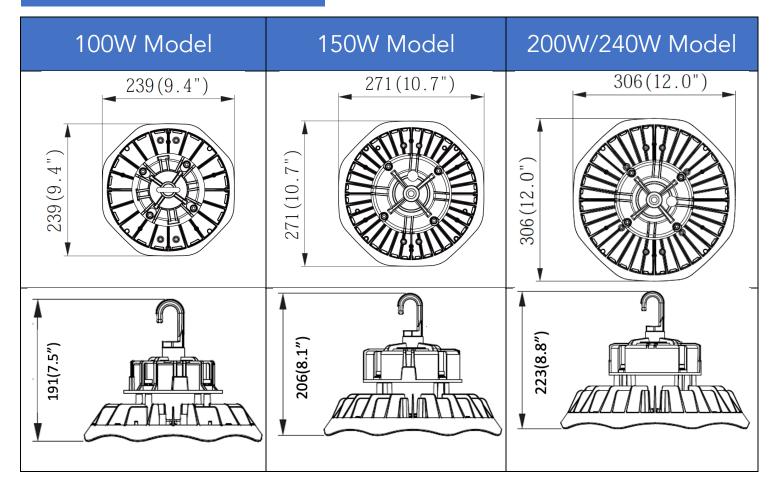

Accessories



LED Fixture 100 -277V 50/60Hz Input



Plug and Play PIR Occupancy Sensor (Optional)




HD06VCRH Remote Controller (Optional)

Model # TORSHARE UHB07XX Series (7th generation UFO High Bay)




Photometric Data (200W Model)

Distance (Height)	Center Beam fc	Beam Width
17.0 ft	19.94 fc	40.8 ft
34.0 ft	4.98 fc	81.7 ft
51.0 ft	2.22 fc	122.5 ft
68.0 ft	1.25 fc	163.4 ft
85.0 ft	0.80 fc	204.2 ft
102.ft	0.55 fc	245.1 ft




Accessories

Hook :

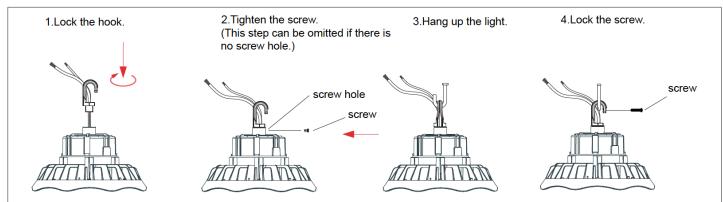

Hanger Pole Installation (Optional)

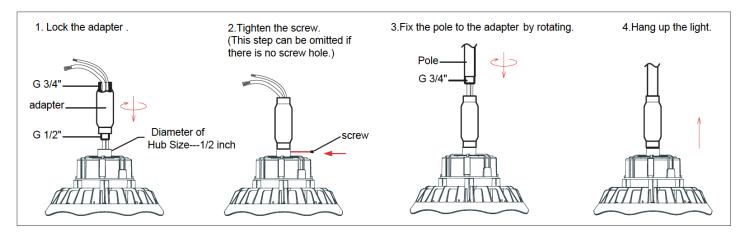






Wiring Instruction:

Turn off the power. Connect the black wire to L, white wire to N, and green wire to E.

Dimmer connection: (with dimmable driver). Compatible with 1-10V dimming. Connect purple wire to D+, gray wire is D-, cap black wire.

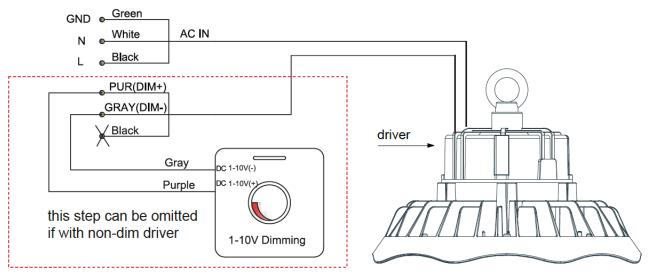

Note:

- 1. Any form of installation/uninstallation or maintenance and electrical work must only be performed by a qualified electrician.
- 2. All wiring should be done after cutting off the power.
- 3. The UFO high bay light must be grounded.
- 4. Always keep the lens/diffuser of UFO high bay light cleaned to maintain good light transmission.
- 5. Always keep the shell of UFO high bay cleaned to maintain good heat dissipation.
- 6. Cleaning must only be done with dry or wet cloth and the high
- 7. High voltage inside the fixture, please do not disassemble it. Serious electric shock may occur otherwise.

Warranty

The manufacturer Torshare Ltd warrants this product to be free from defects in workmanship and materials, under normal residential use and conditions, for a period of five (5) year for the original invoice date. Shipping and handling fees are to be paid for by the customer. The manufacturer agrees, at its option during the warranty period, to repair and defect in material or workmanship or to furnish a repaired or refurbished product of equal value in exchange without charge (except for a fee for shipping, handling, packing, return postage, and insurance which will be incurred by the customer). Such repair or replacement is subject to verification of the defect or malfunction and proof of purchase as confirmed by showing the model number on original dated sales receipt.

